

# Environmental Product Declaration

## for Epoxy Coatings and Primers by ISOMAT

**Programme**  
The International  
EPD® System,  
[www.environdec.com](http://www.environdec.com)


**Programme  
operator**  
EPD International AB

**EPD  
registration  
Number**  
EPD-IES-0016841

**Publication  
date**  
2024-10-17

**Valid until**  
2029-10-16

**Geographical  
scope**  
Global

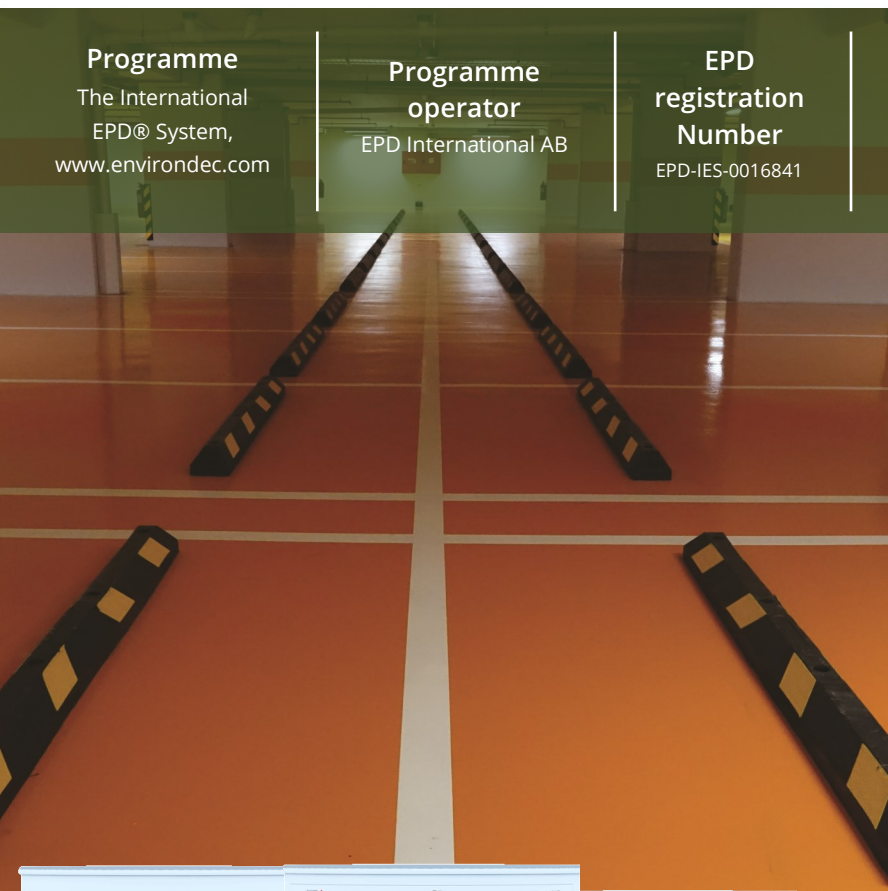

EPD of multiple products, based on the weighted average  
results of the product group

In accordance with ISO 14025  
and EN 15804:2012 + A2:2019/AC

**DUROFLOOR**  
**DUROFLOOR-R**  
**DUROFLOOR-PSF**  
**DUROPRIMER-PRO**

*An EPD should provide current information and may be updated if conditions change.  
The stated validity is therefore subject to the continued registration and publication at [www.environdec.com](http://www.environdec.com).*

|                      |                                                                                   |                                                                                                                                                                                        |
|----------------------|-----------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| EPD owner            |  | ISOMAT S.A.<br>BUILDING CHEMICALS, MORTARS & PAINTS<br>17th km Thessaloniki – Ag. Athanasios Road,<br>P.O. BOX 1043, 570 03 Ag. Athanasios, Greece<br>export@isomat.eu   www.isomat.eu |
| LCA accountability   |  | ENVIROMETRICS S.A.<br>Kodrou 3 str., 152 32, Chalandri, Greece<br>info@envirometrics.gr   www.envirometrics.gr                                                                         |
| Programme operator   |  | EPD International AB Box 210 60 SE-100 31<br>Stockholm Sweden<br>www.environdec.com   info@environdec.com                                                                              |
| Third party verifier | <b>Greentability Ltd.</b>                                                         | <b>Greentability Ltd.</b><br>Dr. Nikolay Minkov,<br>Vitosha blvd. 66, 1463, Sofia, Bulgaria                                                                                            |
| Accredited by        | The International EPD® system                                                     |                                                                                                                                                                                        |

Independent third-party verification of the declaration and data, according to ISO 14025:2006:

☐ EPD process certification ☒ EPD verification

Procedure for follow-up of data during EPD validity involves third party verifier:

☐ Yes ☒ No

## Product category rules (PCR)

CEN standard EN 15804 serves as the Core Product Category Rules (PCR).

Product category rules (PCR): PCR 2019:14 Construction products, version 1.3.4. Published on 2024.04.30, valid until: 2025.06.20.

CPC CODE: 351, Paints ,varnishes and other related products.

PCR review was conducted by: The Technical Committee of the International EPD System. See [www.environdec.com](http://www.environdec.com) for a list of members. Review chair: Claudia A. Peña, University of Concepción, Chile. The review panel may be contacted via the Secretariat [www.environdec.com/contact](http://www.environdec.com/contact).

The EPD owner has the sole ownership, liability, and responsibility of the EPD.

EPDs within the same product category but registered in different EPD programs may not be comparable. For two EPDs to be comparable, they must be based on the same PCR (including the same version number) or be based on fully-aligned PCRs or versions of PCRs; cover products with identical functions, technical performances and use (e.g. identical declared/functional units); have equivalent system boundaries and descriptions of data; apply equivalent data quality requirements, methods of data collection, and allocation methods; apply identical cut-off rules and impact assessment methods (including the same version of characterization factors); have equivalent content declarations; and be valid at the time of comparison. For further information about comparability, see EN 15804 and ISO 14025.

## Company Info

**ISOMAT** is a multinational Group specializing in the development and manufacture of building chemicals, mortars and paints. For 45 years, **ISOMAT** has been making a history of quality, reliability, deep expertise and continuous business growth. It has 3 production plants; one in the parent company in Greece and two in its subsidiaries in Romania and Serbia. In addition, it has 3 commercial subsidiaries in Germany, Slovenia, and Bulgaria and exports to over 80 countries worldwide.



The **ISOMAT** Group produces and distributes an extensive range of high-quality products falling into the following 8 categories:

- Waterproofing
- External Thermal Insulation
- Paints & Surface Protection
- Tile & Natural Stone Installation
- Concrete Admixtures & Repair Products
- Masonry Construction & Repair
- Industrial Floorings
- Microcement Coatings & Decorative Floorings

Staying true to its vision of being a leading partner to the global construction industry by providing reliable and innovative integrated solutions, **ISOMAT** invests in Research and Development with sustainability at the core of new product development and existing product improvement. Drawing on scientific knowledge, its dedicated team of experts at 7 R&D centers and 3 Quality Control labs (in Greece and its subsidiaries in Serbia and Romania) develops numerous pioneering products each year, while optimizing existing ones to align with the ever-evolving market demands and the latest technological advancements in the construction industry.

## Energy, Quality and Social Responsibility Policies

For **ISOMAT**, its people are the most valuable asset, and investing in them is a key factor in its continuous evolution. The primary focus areas include ensuring safe and healthy working conditions and offering ongoing training through technical and educational seminars. Furthermore, **ISOMAT** actively engages in corporate social responsibility, supporting socially vulnerable groups, public benefit foundations, hospitals, educational institutions, and public services. Moreover, with a strong customer-centric approach, **ISOMAT** adeptly addresses its customers' ever-changing needs while delivering an exceptional service experience.

**ISOMAT** adheres to legislative requirements, the ISO 9001 standard, and other international standards, which underpin its product certifications. The effectiveness of the Quality Management System is consistently improved, with measurable quality targets set and reviewed on an annual basis. These objectives are outlined in the annual quality review.

Sustainability is a strategic priority for the **ISOMAT** Group. **ISOMAT** implements Energy and Environmental Management systems, certified according to ISO 50001 and ISO 14001, to reduce the consumption of available natural resources, including water, and save energy and associated emissions during the production process. **ISOMAT** has incorporated the processes of both the Energy and the Environmental Management systems into its standard operating procedures by investing in high energy efficiency equipment which enable producing its products with minimal impact on the environment and ensure compliance with the National and European environmental legislation. Staying true to its commitment to reducing its carbon footprint, **ISOMAT** installed a 1MW rooftop solar PV power system at its headquarters in Thessaloniki, Greece. In addition, **ISOMAT**'s new EPS (expanded polystyrene) production unit, is the first in Greece and currently the only one of its kind operating with zero direct carbon dioxide emissions. The unit also features a zero waste EPS recycling system. Moving towards a circular economy, **ISOMAT** joined the "In the Loop" environment-driven platform in May 2022, systematically separating and collecting its plastic waste so that new, sustainable products can be produced. Last but not least, aiming towards a more sustainable future, **ISOMAT** is continuously developing and producing premium-quality products that contribute to a healthy living and working environment. These products have received internationally recognized certifications for both their technical characteristics and their friendliness towards applicators, end-users, and the environment.

## P R E M I S E S



## Product Info

In this EPD, weighted average results (based on the production masses of each product) of four epoxy products (DUROFLOOR, DUROFLOOR-R, DUROFLOOR-PSF & DUOPRIMER-PRO) will be presented. The products are manufactured in ISOMAT premises in Agios Athanasios, Greece.

### Epoxy Coatings and Primers

DUROFLOOR

DUROFLOOR-R

DUROFLOOR-PSF

DUOPRIMER-PRO

#### DUROFLOOR

DUROFLOOR is a two-component, colored, self leveling epoxy system offering high strength and abrasion resistance. It shows resistance to organic and inorganic acids, alkalis, petroleum products, waste, water, seawater, and numerous solvents. It is resistant to temperatures ranging from -30°C to +100°C in dry loading and up to +60°C in wet loading. DUROFLOOR is used as a pourable, self-leveling floor coating on cement-based floors requiring high mechanical strength or chemical resistance. Suitable for industrial facilities, warehouses, shopping malls, supermarkets, hotels, parking garages, heavy-traffic areas, gas stations, auto repair shops, slaughterhouses, laboratories, hospitals, wineries, canning factories, etc.

Certified according to EN 1504-2 and classified as coating for surface protection of concrete. Certificate No: 2032-CPR-10.11. Also certified according to EN 13813 and classified as SR-B2,0-AR0,5-IR4. CE marked.

#### DUROFLOOR-R

DUROFLOOR-R is a two-component, colored epoxy system, offering high strength and abrasion resistance. It is resistant to organic and inorganic acids, alkalis, petroleum products, waste, water, sea water and weather conditions. It is also resistant to temperatures from -30°C to +100°C in dry loading and up to +60°C in wet loading. DUROFLOOR-R is used as a roller-applied coating for floors requiring high mechanical and chemical strength. It is suitable for cement-based substrates, e.g. concrete, cement mortars, as well as for steel or iron surfaces in industrial areas, warehouses, laboratories, hospitals, wine factories, slaughterhouses, canning industries, garages, car repair shops, etc.

Certified according to EN 1504-2 and classified as coating for surface protection of concrete. Certificate No: 2032-CPR-10.11. Also certified according to EN 13813 and classified as SR-B2.0-AR0.5-IR4. CE marked.

#### DUROFLOOR-PSF

DUROFLOOR-PSF is a two-component, solvent free, transparent epoxy system. It offers high hardness and abrasion resistance. It is resistant to acids, alkalis, petroleum products and salt solutions. DUROFLOOR-PSF is suitable for priming cementitious surfaces to be covered with epoxy floor coatings from the DUROFLOOR range, sealing cementitious floors in industrial areas, warehouses, etc., preparing resin mortars for floorings, preparing material for repairing cracks or smoothing substrates prior to application of flooring layers.

Certified according to EN 13813 and classified as SR-B2,0-AR0,5-IR4. CE marked.

#### DUOPRIMER-PRO

DUOPRIMER-PRO is a two-component, solvent free epoxy primer, offering high hardness and abrasion resistance. It is resistant to acids, alkalis, petroleum products and salt solutions. It is suitable for priming of cementitious surfaces to be covered with products from the DUROFLOOR range, preparation of resin mortars, preparation of material for repairing cracks or smoothing substrates before applying flooring layers.

Certified according to EN 13813 and classified as SR-B2,0-AR0,5-IR4. CE marked.

### Technical Specifications

| Specification                     | DUROFLOOR                       | DUROFLOOR-R                     | DUROFLOOR-PSF             | DUROPRIMER-PRO            |
|-----------------------------------|---------------------------------|---------------------------------|---------------------------|---------------------------|
| Form                              | two-component epoxy resin       | Two-component epoxy resin       | Two-component epoxy resin | Two-component epoxy resin |
| Color                             | 7 RAL colors and other on order | 8 RAL colors and other on order | Transparent               | off-white                 |
| Density (A+B)                     | 1,11 kg/l                       | 1,46 kg/l                       | 1,07 kg/l                 | 1,49 kg/l                 |
| Viscosity                         | 500 mPa*s                       | 1.900 mPa*s                     | 710 mPa*s                 | 1.000 mPa*s               |
| Mixing ratio (A:B)                | 100:48 per weight               | 100:25 per weight               | 100:45 per weight         | 100:18 per weight         |
| Abrasion resistance (EN 13892-4)  | < 50 µm                         | < 50 µm                         | < 50 µm                   | -                         |
| Compressive strength (EN 13892-2) | ≥ 95 N/mm <sup>2</sup>          | ≥ 52 N/mm <sup>2</sup>          | ≥ 55 N/mm <sup>2</sup>    | ≥ 45 N/mm <sup>2</sup>    |
| Flexural strength (EN 13892-2)    | ≥ 63 N/mm <sup>2</sup>          | ≥ 34 N/mm <sup>2</sup>          | ≥ 35 N/mm <sup>2</sup>    | ≥ 15 N/mm <sup>2</sup>    |
| Adhesion strength                 | ≥ 3 N/mm <sup>2</sup>           | ≥ 3 N/mm <sup>2</sup>           | ≥ 3 N/mm <sup>2</sup>     | ≥ 3 N/mm <sup>2</sup>     |
| Reaction to fire (EN 13501-1)     | Bfl- s1                         | Bfl- s1                         | Ffl                       | Ffl                       |
| Hardness (SHORE D)                | 80                              | 80                              | 83                        | 82                        |

According to the Registration, Evaluation, Authorization and Restriction of Chemicals (REACH) Regulation, the product does not contain any substance included in the Candidate List of Substances of Very High Concern (SVHCs) for authorization with concentrations higher than 0.1% weight by weight (w/w).

| Average content of the declared average product |             |                                    | Composition (kg per kg of product/component) | Biogenic carbon content (kg C per kg of product) |
|-------------------------------------------------|-------------|------------------------------------|----------------------------------------------|--------------------------------------------------|
| Raw materials                                   | component A | Bisphenol                          | 0,40-0,70                                    | -                                                |
|                                                 |             | Benzyl alcohol                     | <0,04                                        | -                                                |
|                                                 |             | Methyl ether                       | <0,04                                        | -                                                |
|                                                 |             | Quartz sand                        | 0,25-0,45                                    | -                                                |
|                                                 |             | Titanium dioxide                   | <0,02                                        | -                                                |
|                                                 |             | Other organic compounds            | <0,01                                        | -                                                |
|                                                 | component B | Cycloaliphatic polyamine hardeners | 0,50-0,75                                    | -                                                |
|                                                 |             | Polyamine adduct hardeners         | 0,25-0,50                                    | -                                                |
| Packaging materials                             |             | Steel drums                        | 8,56E-02                                     | -                                                |

## System Boundaries

|                                     | Product stage                                  |           |               | Construction stage |                           | Use stage |             |        |             |               |                        |                       | End-of-life stage              |           |                                                        |          | Resource recovery stage             |
|-------------------------------------|------------------------------------------------|-----------|---------------|--------------------|---------------------------|-----------|-------------|--------|-------------|---------------|------------------------|-----------------------|--------------------------------|-----------|--------------------------------------------------------|----------|-------------------------------------|
|                                     | Raw Materials Supply                           | Transport | Manufacturing | Transport          | Construction installation | Use       | Maintenance | Repair | Replacement | Refurbishment | Operational energy use | Operational water use | De-construction and demolition | Transport | Waste processing for re-use, recovery and/or recycling | Disposal | Re-use-Recovery-Recycling-potential |
| Module                              | A1                                             | A2        | A3            | A4                 | A5                        | B1        | B2          | B3     | B4          | B5            | B6                     | B7                    | C1                             | C2        | C3                                                     | C4       | D                                   |
| Modules declared                    | X                                              | X         | X             | X                  | X                         | X         | X           | X      | X           | X             | X                      | X                     | X                              | X         | X                                                      | X        | X                                   |
| Geography                           | EU                                             | EU        | GR            | GR                 | GR                        | GLO       | GLO         | GLO    | GLO         | GLO           | GLO                    | GLO                   | EU                             | EU        | EU                                                     | EU       | EU                                  |
| GWP-GHG share of Specific data used | 13,7%                                          |           |               | —                  | —                         | —         | —           | —      | —           | —             | —                      | —                     | —                              | —         | —                                                      | —        | —                                   |
| Variation-products                  | Up to 16,86% from declared average, in GWP-GHG |           |               | —                  | —                         | —         | —           | —      | —           | —             | —                      | —                     | —                              | —         | —                                                      | —        | —                                   |
| Variation-sites                     | 0%                                             |           |               | —                  | —                         | —         | —           | —      | —           | —             | —                      | —                     | —                              | —         | —                                                      | —        | —                                   |

### Product stage (A1-A3)

Product stage (modules A1-A3) includes raw material supply, transportation, and manufacturing.

#### A1: Raw Material Supply

Production starts with the material supply. This module includes the mining and pretreatment processes before production (processing of raw materials, generation of electricity required for the manufacturing). Bisphenol, benzyl alcohol, quartz sand and other hardeners and additives are the main raw materials. Furthermore, electricity production and transmission is included in this module.

## A2: Transportation of raw materials to manufacturer

Transportation is relevant to the delivery of raw materials from the supplier to the gate of manufacturing plant. Raw materials are transported to the manufacturing site of ISOMAT in Agios Athanasios, Greece from suppliers located mainly in Central Europe. A EURO5 lorry 16-32 metric ton was assumed for road transportation and a bulk carrier for dry goods for sea transportation.

## A3: Manufacturing

This module incorporates all impacts related to the manufacturing stage of products. Waste management and direct emissions (if any) are included here. Personnel-related activities, such as transportation of employees to and from work, and production of infrastructure and capital goods are not included in the scope of this study.

The manufacturing process includes the following steps:

- **Quality Control:** The raw materials undergo rigorous testing to ensure they meet the company's quality standards.
- **Storage:** Materials are stored in controlled environments to prevent contamination or degradation before use.
- **Batch Preparation:** Raw materials are weighed and measured according to precise formulations.
- **Mixing:** The materials are then mixed in industrial mixers to achieve a homogeneous blend.
- **Packaging:** The final product is packaged into steel drums.

## Construction/Installation stage (A4-A5)

Modules A4 & A5 are also included in the study. The scenarios included are currently in use and are representative for one of the most probable alternatives. Additional declaration of representative mixes for the relevant region is permissible.

### A4 : Transport

This stage incorporates all impacts related to the transportation of final products to the construction/installation stage. It is assumed that the final products cover an average distance of 500 km from the manufacturing site of Agios Athanasios to the construction site. ISOMAT takes on projects from all over Greece (and mainly Athens), so this assumption is quite representative.

| Scenario information                                                                                        | Unit (expressed per functional unit or per declared unit) |
|-------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------|
| Fuel type and consumption of vehicle or vehicle type used for transport e.g. long distance truck, boat etc. | EURO 5 truck, diesel                                      |
| Distance                                                                                                    | 500 km                                                    |
| Capacity utilisation (including empty returns)                                                              | 100%                                                      |
| Bulk density of transported products                                                                        | Not applicable                                            |
| Volume capacity utilisation factor (factor: =1 or <1 or ~1 for compressed or nestedpackaged products)       | Not applicable                                            |

### A5: Construction installation

This module in general includes the impacts during the installation of epoxy products and polyurea membranes into the building (from electricity required), as well as the treatment of packaging materials (steel drums) after the installation. In epoxy products, energy is consumed when mixing and homogenizing the components before their application. The energy consumed is 0.075 kWh/kg, since it is a 1500-Watt power drill that is used for about 3 minutes for homogenization.

Finally, for waste packaging treatment, it is assumed that 85% of steel packaging is going to be recycled and 15% is going to be landfilled, according to the 7th Global study of World Steel Association. (<https://worldsteel.org/wp-content/uploads/Life-cycle-inventory-LCI-study-2020-data-release.pdf>)

| Scenario information                                                                                                                                                         | Unit (expressed per functional unit or per declared unit) |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------|
| Ancillary materials for installation (specified by material);                                                                                                                | Not applicable                                            |
| Water use                                                                                                                                                                    | Not applicable                                            |
| Other resource use                                                                                                                                                           | Not applicable                                            |
| Quantitative description of energy type and consumption during the installation process                                                                                      | Greek electricity grid mix: 0,075 kWh                     |
| Waste materials on the building site before waste processing, generated by the product's installation (specified by type)                                                    | Not applicable                                            |
| Output materials (specified by type) as result of waste processing at the building site e.g. of collection for recycling, for energy recovery, disposal (specified by route) | Waste packaging materials (steel drums): 8,56E-02 kg      |
| Direct emissions to ambient air, soil and water                                                                                                                              | Not applicable                                            |

### **Use stage (B)**

Modules B (B1-B7) incorporate all possible emissions during the use stage, including operation energy and water use during the product's life span, refurbishment, replacement, repair and maintenance. In this project, although these modules are taken into account, it is assumed that they have zero environmental impact.

### **End of life stage (C1-C4)**

The end-of-life stages begin with the deconstruction and demolition from the installation site and then the waste is transferred for disposal of the product. The scenarios included are currently in use and are representative for one of the most probable alternatives. Additional declaration of representative mixes for the relevant region is permissible.

#### **C1: De-construction and demolition**

This stage concerns the impact arising from energy required during demolition process. It is assumed that the energy needed for the de-construction of final products is the same as module A5.

#### **C2: Transportation to waste processing**

This module includes the transportation of the discarded product to landfills for final disposal. A distance of 50 km by lorry 16-32 tonnes from construction/demolition sites to scrap dealers and disposal sites has been chosen as a conservative assumption.

#### **C3: Waste processing for reuse, recovery and/or recycling**

This module includes the impacts arising from potential recycling/reuse of final products after their life cycle. As an assumption and worst-case scenario, final products are going to be 100% disposed after their life cycle. Thus, environmental impacts in C3 module are considered to be zero.


#### **C4: Disposal**

As an assumption and worst-case scenario-, final products are going to be 100% disposed after their life cycle.

### **Resource and recovery stage (D)**

#### **D: Reuse-Recovery-Recycling-potential**

Module D generally includes potential avoided burdens related to the potential reuse and/or recycling of the product after its end-of-life stage. In this case, since the product is assumed to be 100% landfilled, only the environmental benefits from the reuse of the part of steel drums (for packaging) that is recycled is taken into account.

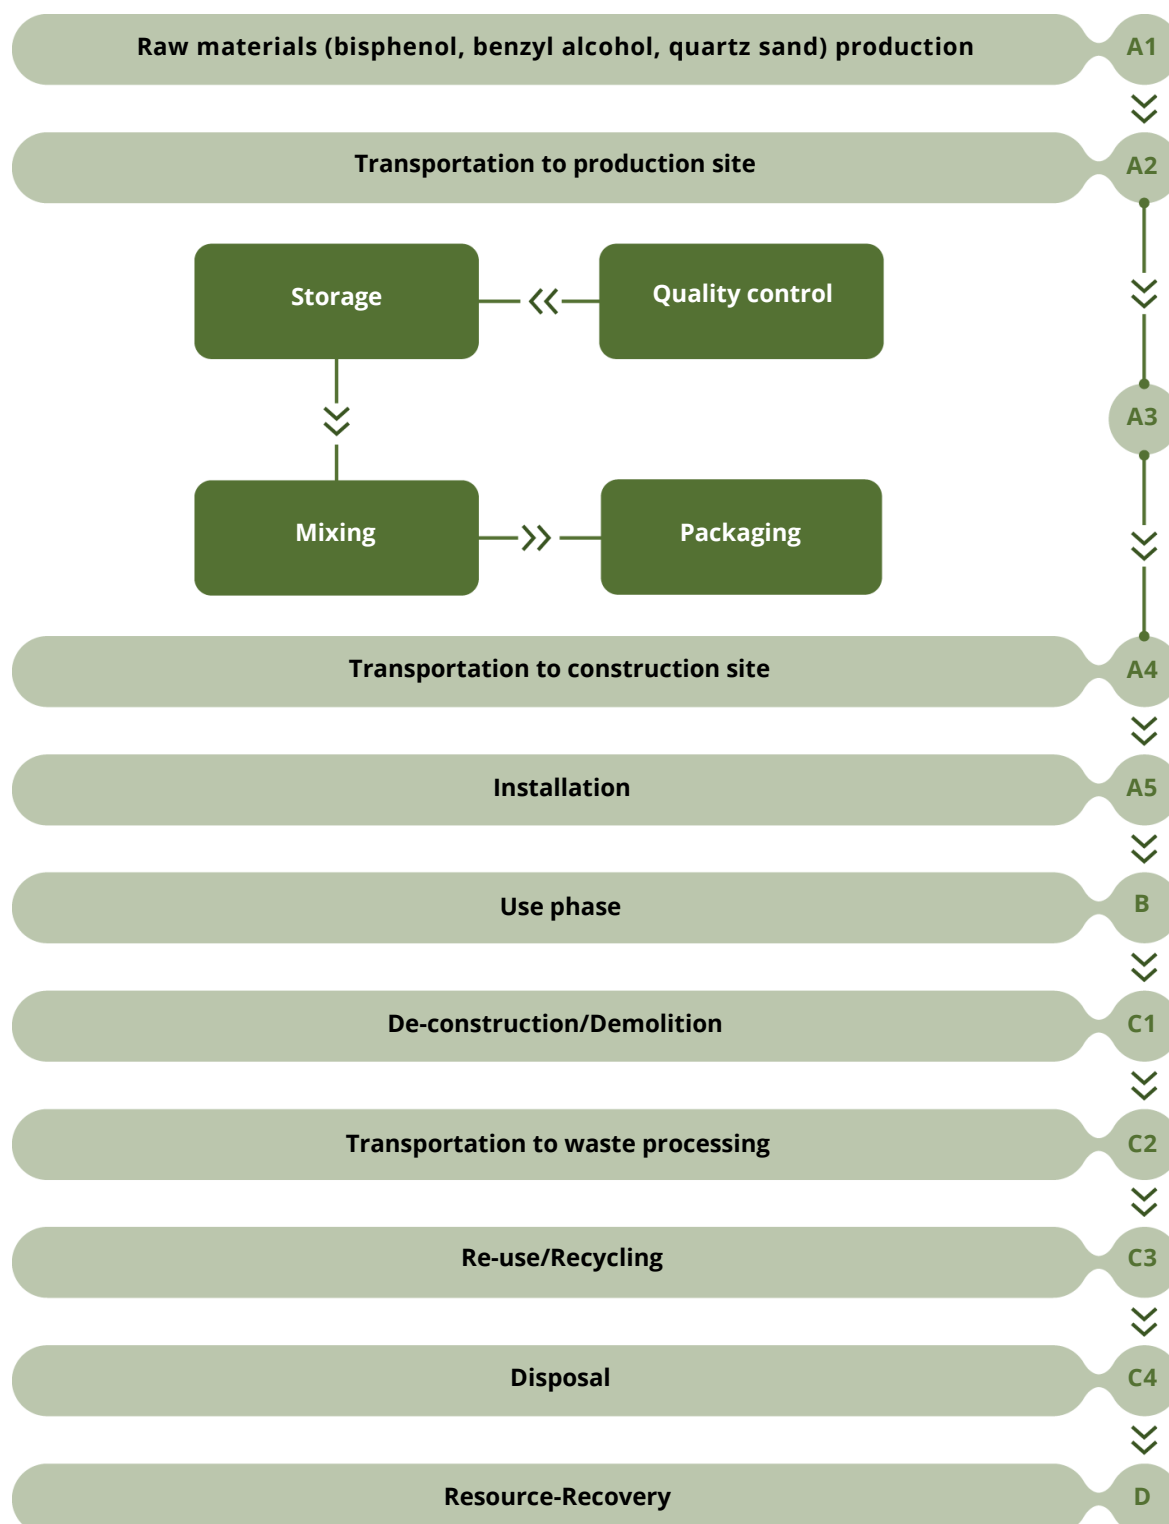

## LCA Information

### Declared unit:

The declared unit is 1 kg of weighted average epoxy-based products (DUROFLOOR, DUROFLOOR-R, DUROFLOOR-PSF, DUROPRIMER-PRO). The case is that each of the four epoxy products are composed of two components, (A) & (B), with a certain mixing ratio. The components (A) and (B) are not standalone products.

### DUROFLOOR:

Mixing ratio (A:B): 100 : 48. So, the declared unit of DUROFLOOR means 0,68 kg of component (A) and 0,32 kg of component (B).

### DUROFLOOR-R:

Mixing ratio (A:B): 100 : 25. So, the declared unit of DUROFLOOR-R means 0,8 kg of component (A) and 0,2 kg of component (B).

### DUROFLOOR-PSF:

Mixing ratio (A:B): 100 : 46. So, the declared unit of DUROFLOOR-PSF means 0,69 kg of component (A) and 0,31 kg of component (B).

### DUROPRIMER-PRO:

Mixing ratio (A:B): 100 : 18. So, the declared unit of DUROPRIMER-PRO means 0,85 kg of component (A) and 0,15 kg of component (B).

### Goal and Scope:

This EPD evaluates the environmental impacts of the production of 1 kg of weighted average epoxy products from cradle to gate (modules A1-A3) with options (A4 -A5, C1-C4, B1-B7 and modules D)-Type b EPD.

### System Boundary:

The system boundaries are set to be cradle to gate (modules A1-A3) with options (A4-A5, B1-B7, C1-C4 and modules D).

### Cut-off:

The cut-off criteria adopted is as stated in "EN 15804:2012+A2:2019". Where there is insufficient data for a unit process, the cut-off criteria are 1% of the total mass of input of that process. The total of neglected input flows per module is a maximum of 5% of energy usage and mass. In this case, no cut-off was applied to any stream.

### Allocations:

Allocation rules have been performed in accordance with the requirements of ISO 14044:2006. Where allocation cannot be avoided, the inputs and outputs of the system were partitioned between its different products or functions in a way that reflects the underlying physical or economic relationships between them. Mass allocation is applied to energy carriers (electricity) and waste produced during the manufacturing process, based on the mass of the final epoxy products studied and total quantities of epoxy production line.

### Data quality:

ISO 14044 was applied in terms of data collection and quality requirements. The impact of the production of raw materials recovered from Ecoinvent database v.3.9.1+EN 15804 add-on. The data concerning the modules A2 (Transportation) and A3 (Product manufacturing) were provided by ISOMAT and concerns the full year 2023. These data were the quantities of all input and output materials extracted from the company's SAP system and products recipes, the consumed utilities (energy) and the distances and means of transport for each input stream. Regarding electricity mix, the latest (2023) national residual electricity mix as published in DAPEEP SA was utilized. In 2023, ISOMAT consumed both electricity derived from grid and electricity from solar panels. The climate impact of electricity from grid is 0,4987 kg CO<sub>2</sub> eq./kWh according to DAPEEP, while impact for the production of solar energy is 0,046 kg CO<sub>2</sub> eq./kWh, according to a representative dataset from Ecoinvent. Background data for this stage are retrieved from Ecoinvent v.3.9.1+EN 15804 add-on.

### Geographical Scope:

Worldwide

**Time representativeness:**

Data obtained refer to the year 2023

**Software used:**

OpenLCA v.2.1

**Reference package (JRC):**

Based on characterization factors from EF 3.1.

## Environmental Performance

The results of life cycle assessment for 1 kg of the weighted average product of DUROFLOOR, DUROFLOOR-R, DUROFLOOR-PSF & DUROPRIMER-PRO are presented below. The deviations of each product from the declared average are presented in Appendix. The use of the results of modules A1-A3 is discouraged without considering the results of module C. The estimated impact results are only relative statements, which do not indicate the endpoints of the impact categories, exceeding threshold values, safety margins and/or risks.

| IMPACTS                    | Unit                  | A1-A3    | A4       | A5       | B1-B7    | C1        | C2       | C3       | C4       | D         |
|----------------------------|-----------------------|----------|----------|----------|----------|-----------|----------|----------|----------|-----------|
| <b>GWP-total</b>           | kg CO <sub>2</sub> eq | 2.59E+00 | 9.43E-02 | 5.50E-02 | 0.00E+00 | 5.30E-02  | 1.89E-02 | 0,00E+00 | 1.03E-01 | -4.06E-02 |
| <b>GWP-fossil</b>          | kg CO <sub>2</sub> eq | 2.59E+00 | 9.41E-02 | 5.50E-02 | 0.00E+00 | 5.30E-02  | 1.88E-02 | 0,00E+00 | 1.03E-01 | -3.99E-02 |
| <b>GWP-biogenic</b>        | kg CO <sub>2</sub> eq | 6.07E-03 | 8.23E-05 | 0.00E+00 | 0.00E+00 | -2.43E-05 | 1.65E-05 | 0,00E+00 | 7.30E-05 | -5.65E-04 |
| <b>GWP-luluc</b>           | kg CO <sub>2</sub> eq | 1.13E-03 | 4.57E-05 | 7.05E-06 | 0.00E+00 | 4.24E-06  | 9.14E-06 | 0,00E+00 | 8.65E-06 | -5.09E-05 |
| <b>GWP-GHG<sup>1</sup></b> | kg CO <sub>2</sub> eq | 2.59E+00 | 9.42E-02 | 5.50E-02 | 0.00E+00 | 5.30E-02  | 1.88E-02 | 0,00E+00 | 1.03E-01 | -4.00E-02 |
| <b>ODP</b>                 | kg CFC-11 eq          | 5.19E-08 | 2.05E-09 | 2.14E-09 | 0.00E+00 | 2.11E-09  | 4.10E-10 | 0,00E+00 | 2.78E-10 | -5.36E-10 |
| <b>AP</b>                  | mol H <sup>+</sup> eq | 1.21E-02 | 3.07E-04 | 2.39E-04 | 0.00E+00 | 2.17E-04  | 6.14E-05 | 0,00E+00 | 8.37E-05 | -1.80E-04 |
| <b>EP-freshwater</b>       | kg P eq               | 6.30E-04 | 6.59E-06 | 5.04E-05 | 0.00E+00 | 4.93E-05  | 1.32E-06 | 0,00E+00 | 1.53E-06 | -2.21E-05 |
| <b>EP-marine</b>           | kg N eq               | 2.16E-03 | 1.06E-04 | 4.65E-05 | 0.00E+00 | 4.13E-05  | 2.11E-05 | 0,00E+00 | 3.13E-05 | -3.95E-05 |
| <b>EP-terrestrial</b>      | mol N eq              | 2.18E-02 | 1.11E-03 | 4.02E-04 | 0.00E+00 | 3.45E-04  | 2.23E-04 | 0,00E+00 | 3.34E-04 | -4.05E-04 |
| <b>POCP</b>                | kg NMVOC eq           | 1.05E-02 | 4.59E-04 | 1.51E-04 | 0.00E+00 | 1.33E-04  | 9.17E-05 | 0,00E+00 | 1.38E-04 | -1.31E-04 |
| <b>ADPe</b>                | kg Sb eq              | 1.54E-05 | 3.09E-07 | 1.44E-07 | 0.00E+00 | 2.76E-08  | 6.19E-08 | 0,00E+00 | 2.52E-08 | -2.30E-07 |
| <b>ADPf</b>                | MJ                    | 5.74E+01 | 1.34E+00 | 7.76E-01 | 0.00E+00 | 7.48E-01  | 2.69E-01 | 0,00E+00 | 2.57E-01 | -5.81E-01 |
| <b>WDP</b>                 | m3 eq                 | 1.41E+00 | 6.59E-03 | 4.42E-03 | 0.00E+00 | 3.98E-03  | 1.32E-03 | 0,00E+00 | 1.44E-03 | -2.13E-02 |

<sup>1</sup> GWP-GHG indicator includes all greenhouse gases included in GWP-total but excludes biogenic carbon dioxide emissions and uptake and biogenic carbon stored in the product, with characterization factors (CFs) based on IPCC (2013).

<sup>2</sup> The results of this environmental impact indicators of ADPf, ADPe and WDP shall be used with care as the uncertainties of these results are high or as there is limited experience with the indicator.

| RESOURCE USE | Unit           | A1-A3    | A4       | A5       | B1-B7    | C1       | C2       | C3       | C4       | D         |
|--------------|----------------|----------|----------|----------|----------|----------|----------|----------|----------|-----------|
| PERE         | MJ             | 1.56E+00 | 2.07E-02 | 3.45E-02 | 0.00E+00 | 3.06E-02 | 4,14E-03 | 0,00E+00 | 4.60E-03 | -8.20E-02 |
| PERM         | MJ             | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0,00E+00 | 0,00E+00 | 0.00E+00 | 0.00E+00  |
| PERT         | MJ             | 1.56E+00 | 2.07E-02 | 3.45E-02 | 0.00E+00 | 3.06E-02 | 4,14E-03 | 0,00E+00 | 4.60E-03 | -8.20E-02 |
| PENRE        | MJ             | 5.27E+01 | 1.23E+00 | 7.51E-01 | 0.00E+00 | 7.25E-01 | 2.46E-01 | 0,00E+00 | 2.35E-01 | -5.66E-01 |
| PENRM        | MJ             | 4.69E+00 | 1.17E-01 | 2.48E-02 | 0.00E+00 | 2.32E-02 | 2.33E-02 | 0,00E+00 | 2.19E-02 | -1.57E-02 |
| PENRT        | MJ             | 5.74E+01 | 1.34E+00 | 7.76E-01 | 0.00E+00 | 7.48E-01 | 2.69E-01 | 0,00E+00 | 2.57E-01 | -5.81E-01 |
| SM           | kg             | 1.06E-01 | 1.46E-03 | 7.31E-02 | 0.00E+00 | 2.02E-04 | 2.91E-04 | 0,00E+00 | 2.40E-04 | -8.77E-02 |
| RSF          | MJ             | 3.18E-02 | 3.93E-04 | 1.02E-04 | 0.00E+00 | 4.97E-05 | 7.86E-05 | 0,00E+00 | 5.46E-05 | -2.82E-03 |
| NRSF         | MJ             | 1.09E-01 | 7.72E-04 | 1.58E-04 | 0.00E+00 | 9.83E-05 | 1.54E-04 | 0,00E+00 | 1.35E-04 | -3.11E-03 |
| FW           | m <sup>3</sup> | 3.20E-02 | 1.60E-04 | 1.04E-04 | 0.00E+00 | 8.95E-05 | 3.21E-05 | 0,00E+00 | 2.58E-04 | -6.79E-04 |


| OUTPUT FLOWS AND WASTE | Unit | A1-A3     | A4        | A5        | B1-B7    | C1        | C2        | C3       | C4       | D         |
|------------------------|------|-----------|-----------|-----------|----------|-----------|-----------|----------|----------|-----------|
| HWD                    | kg   | 1.49E-01  | 1.25E-03  | 8.87E-04  | 0.00E+00 | 7.75E-04  | 2.49E-04  | 0,00E+00 | 3.42E-04 | -2.76E-02 |
| NHWD                   | kg   | 3.04E-01  | 6.40E-02  | 1.47E-02  | 0.00E+00 | 1.15E-03  | 1.28E-02  | 0,00E+00 | 1.00E+00 | -4.17E-03 |
| RWD                    | kg   | 3.32E-05  | 4.34E-07  | 2.91E-07  | 0.00E+00 | 2.38E-07  | 8.67E-08  | 0,00E+00 | 8.83E-08 | -2.73E-06 |
| CRU                    | kg   | -1.79E-21 | -5.36E-23 | -5.02E-23 | 0.00E+00 | -5.11E-23 | -1.07E-23 | 0,00E+00 | 2.95E-23 | 1.98E-22  |
| MFR                    | kg   | 8.22E-02  | 1.32E-03  | 3.01E-04  | 0.00E+00 | 1.93E-04  | 2.64E-04  | 0,00E+00 | 1.73E-04 | -5.59E-03 |
| MER                    | kg   | 0.00E+00  | 0.00E+00  | 0.00E+00  | 0.00E+00 | 0,00E+00  | 0,00E+00  | 0,00E+00 | 0,00E+00 | 0.00E+00  |
| EE                     | MJ   | 0.00E+00  | 0.00E+00  | 0.00E+00  | 0.00E+00 | 0,00E+00  | 0,00E+00  | 0,00E+00 | 0,00E+00 | 0.00E+00  |

| ADDITIONAL IMPACTS | Unit              | A1-A3    | A4       | A5       | B1-B7    | C1       | C2       | C3       | C4       | D         |
|--------------------|-------------------|----------|----------|----------|----------|----------|----------|----------|----------|-----------|
| PM                 | Disease incidence | 1.24E-07 | 7.49E-09 | 6.68E-10 | 0.00E+00 | 3.63E-10 | 1,50E-09 | 0,00E+00 | 1.80E-09 | -4.06E-09 |
| IRP <sup>3</sup>   | kBq U235 eq       | 1.31E-01 | 1.79E-03 | 1.20E-03 | 0.00E+00 | 9.94E-04 | 3,57E-04 | 0,00E+00 | 3.64E-04 | -1.07E-02 |
| ETP-FW             | CTUe              | 3.20E-02 | 6.59E-01 | 1.44E-01 | 0.00E+00 | 1.23E-01 | 1,32E-01 | 0,00E+00 | 1.33E-01 | -4.11E-01 |
| HTP-c              | CTUh              | 5.12E-09 | 4.29E-11 | 1.45E-11 | 0.00E+00 | 1.16E-11 | 8,58E-12 | 0,00E+00 | 1.32E-11 | -1.97E-09 |
| HTP-nc             | CTUh              | 2.24E-08 | 9.47E-10 | 5.04E-10 | 0.00E+00 | 3.73E-10 | 1,89E-10 | 0,00E+00 | 2.30E-10 | -1.01E-09 |
| SQP                | dimension less    | 6.57E+00 | 7.94E-01 | 9.36E-02 | 0.00E+00 | 4.44E-02 | 1,59E-01 | 0,00E+00 | 5.80E-01 | -1.89E-01 |

<sup>3</sup> Ionizing radiation potential (IRP) impact category deals mainly with the eventual impact of low dose ionizing radiation on human health of the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents, occupational exposure nor due to radioactive waste disposal in underground facilities. Potential ionizing radiation from the soil, from radon and from some construction materials is also not measured by this indicator.


## Interpretation

### GWP Contribution

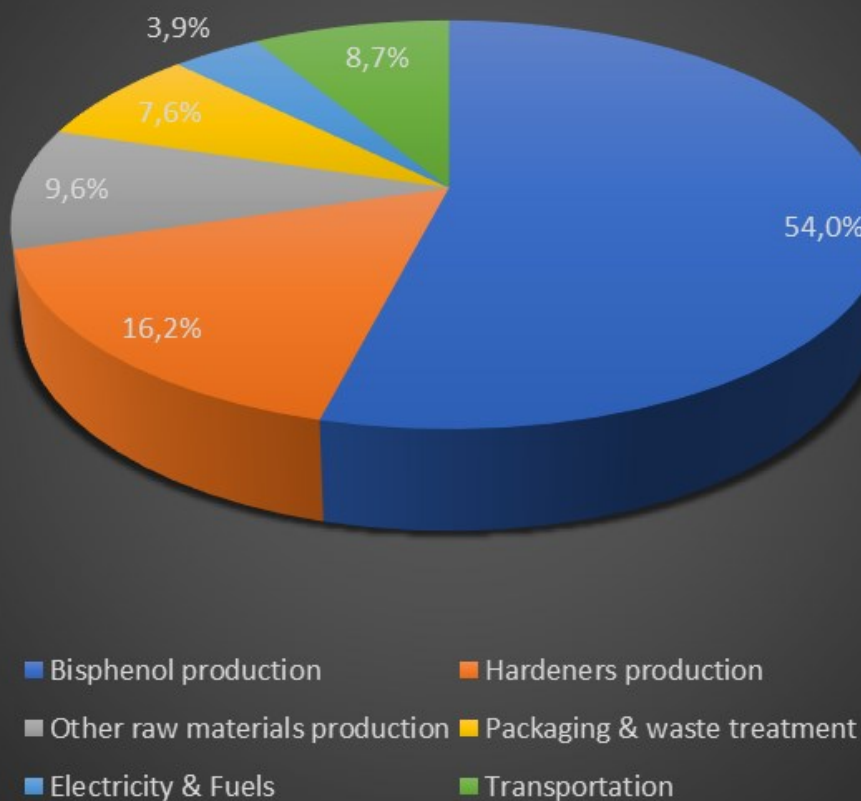

As it is presented above, bisphenols and hardeners production (module A1) contribute the most for the production of epoxy products, accounting for 54% and 16,2% respectively. Next most important stream is the production of the rest components (module A1), accounting for 9,6%. Transportation of raw and packaging materials to ISOMAT manufacturing site (module A2) accounts for 8,7%, while packaging and waste treatment (module A3) is responsible for 7,6%. Production of electricity (module A1) is less important, with a contribution of 3,9%.

### Contribution per module

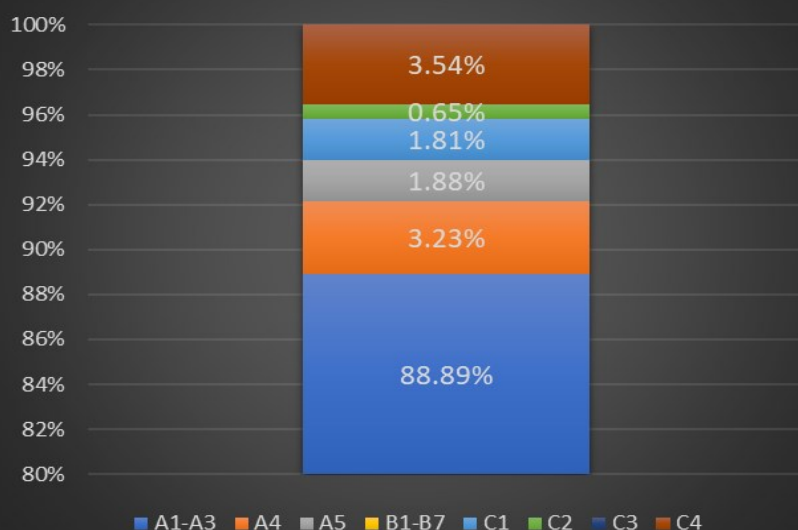

## List of abbreviations

|                        |                                                                                     |
|------------------------|-------------------------------------------------------------------------------------|
| <b>LCA</b>             | Life Cycle assessment                                                               |
| <b>EPD</b>             | Environmental Product Declaration                                                   |
| <b>PCR</b>             | Product category rules                                                              |
| <b>GLO</b>             | Global                                                                              |
| <b>RER</b>             | Europe                                                                              |
| <b>RoW</b>             | Rest of the world                                                                   |
| <b>GWP-total</b>       | Global Warming Potential total                                                      |
| <b>GWP-fossil</b>      | Global Warming Potential fossil                                                     |
| <b>GWP-biogenic</b>    | Global Warming Potential biogenic                                                   |
| <b>GWP-luluc</b>       | Global Warming Potential land use and land use change                               |
| <b>ODP</b>             | Ozone Depletion Potential                                                           |
| <b>AP</b>              | Acidification Potential                                                             |
| <b>EP-freshwater</b>   | Eutrophication potential, fraction of nutrients reaching freshwater end compartment |
| <b>EP-marine</b>       | Eutrophication Potential fraction of nutrients reaching marine end compartment      |
| <b>EP- terrestrial</b> | Eutrophication potential, Accumulated Exceedance                                    |
| <b>POCP</b>            | Formation potential of tropospheric ozone photochemical oxidants                    |
| <b>ADPe</b>            | Abiotic depletion potential for non-fossil resources                                |
| <b>ADPf</b>            | Abiotic depletion potential for fossil resources                                    |
| <b>WDP</b>             | Water use                                                                           |
| <b>PERE</b>            | Use of renewable primary energy excluding resources used as raw materials           |
| <b>PERM</b>            | Use of renewable primary energy resources used as raw materials                     |
| <b>PERT</b>            | Total use of renewable primary energy resources                                     |
| <b>PENRE</b>           | Use of non-renewable primary energy excluding resources used as raw materials       |
| <b>PENRM</b>           | Use of non-renewable primary energy resources used as raw materials                 |
| <b>PENRT</b>           | Total use of non-renewable primary energy resources                                 |
| <b>SM</b>              | Use of secondary material                                                           |
| <b>RSF</b>             | Use of renewable secondary fuels                                                    |

|               |                                       |
|---------------|---------------------------------------|
| <b>NRSF</b>   | Use of non-renewable secondary fuels  |
| <b>FW</b>     | Use of net fresh water                |
| <b>HWD</b>    | Hazardous waste disposed              |
| <b>NHWD</b>   | Non-hazardous waste disposed          |
| <b>RWD</b>    | Radioactive waste disposed            |
| <b>CRU</b>    | Components for re-use                 |
| <b>MFR</b>    | Materials for recycling               |
| <b>MER</b>    | Materials for energy recovery         |
| <b>EE</b>     | Exported Energy                       |
| <b>PM</b>     | Particulate matter emissions          |
| <b>IRP</b>    | Ionizing radiation, human health      |
| <b>ETP-FW</b> | Ecotoxicity, freshwater               |
| <b>HTP-c</b>  | Human toxicity, cancer                |
| <b>HTP-nc</b> | Human toxicity, non-cancer            |
| <b>SQP</b>    | Land use related impacts/Soil quality |

## References

**General Programme Instructions** of the International EPD® System. Version 5.0

**PCR 2019:14** v.1.3.4 Construction products. EPD System.

**EN 15804:2012+A2:2019/AC**, Sustainability of construction works - Environmental Product Declarations — Core rules for the product category of construction products.

**ISO 14020:2000** Environmental labels and declarations — General principles.

**ISO 14025:2006** Environmental labels and declarations — Type III environmental declarations — Principles and procedures.

**ISO 14040:2006** Environmental management — Life cycle assessment — Principles and framework

**ISO 14044:2006** Environmental management — Life cycle assessment — Requirements and guidelines

**Ecoinvent / Ecoinvent Centre**, [www.Eco-invent.org](http://www.Eco-invent.org)

**Residual Energy Mix 2023** from Renewable Energy Sources Operator & Guarantees of Origin (DAPEEP SA)

**TACKLING RECYCLING ASPECTS IN EN15804** -Christian Leroy, Jean-Sebastien Thomas, Nick Avery, Jan Bollen, Ladji Tikana

**World Steel Association, 7th Global study** (<https://worldsteel.org/wp-content/uploads/Life-cycle-inventory-LCI-study-2020-data-release.pdf> )

## Appendix

### Deviations of each product from the declared average

|                       |                       | DUROFLOOR-R | DUROFLOOR | DUROFLOOR-PSF | DUROPRIMER-PRO |
|-----------------------|-----------------------|-------------|-----------|---------------|----------------|
| <b>GWP-total</b>      | kg CO <sub>2</sub> eq | -8.67%      | 19.36%    | 16.85%        | -14.13%        |
| <b>GWP-fossil</b>     | kg CO <sub>2</sub> eq | -8.69%      | 19.34%    | 16.86%        | -14.12%        |
| <b>GWP-biogenic</b>   | kg CO <sub>2</sub> eq | -2.56%      | 25.06%    | 16.36%        | -21.08%        |
| <b>GWP-luluc</b>      | kg CO <sub>2</sub> eq | 0.39%       | 23.78%    | -2.17%        | -3.69%         |
| <b>GWP-GHG</b>        | kg CO <sub>2</sub> eq | -8.68%      | 19.34%    | 16.85%        | -14.12%        |
| <b>ODP</b>            | kg CFC-11 eq          | -5.59%      | 25.07%    | 8.61%         | -8.70%         |
| <b>AP</b>             | mol H <sup>+</sup> eq | 4.42%       | 22.87%    | 18.00%        | -31.35%        |
| <b>EP-freshwater</b>  | kg P eq               | 1.45%       | 26.19%    | -2.95%        | -4.70%         |
| <b>EP-marine</b>      | kg N eq               | -10.37%     | 13.77%    | 22.06%        | -18.88%        |
| <b>EP-terrestrial</b> | mol N eq              | -9.31%      | 15.22%    | 19.21%        | -15.72%        |
| <b>POCP</b>           | kg NMVOC eq           | -3.47%      | 22.00%    | 9.10%         | -9.98%         |
| <b>ADPe</b>           | kg Sb eq              | -15.64%     | 19.21%    | 22.13%        | -16.42%        |
| <b>ADPf</b>           | MJ                    | -4.64%      | 27.19%    | 6.37%         | -7.94%         |
| <b>WDP</b>            | m <sup>3</sup> eq     | -4.47%      | 27.15%    | 16.08%        | -19.59%        |

Deviations from declared average (1)

| RESOURCE USE | Unit           | DUROFLOOR-R | DUROFLOOR | DUROFLOOR-PSF | DUROPRIMER-PRO |
|--------------|----------------|-------------|-----------|---------------|----------------|
| <b>PERE</b>  | MJ             | 0.16%       | 27.01%    | 1.50%         | -7.43%         |
| <b>PERM</b>  | MJ             | 0.00%       | 0.00%     | 0.00%         | 0.00%          |
| <b>PERT</b>  | MJ             | 0.16%       | 27.01%    | 1.50%         | -7.43%         |
| <b>PENRE</b> | MJ             | -4.80%      | 26.95%    | 6.89%         | -8.23%         |
| <b>PENRM</b> | MJ             | -2.89%      | 29.72%    | 0.16%         | -4.75%         |
| <b>PENRT</b> | MJ             | -4.64%      | 27.19%    | 6.37%         | -7.94%         |
| <b>SM</b>    | kg             | 2.20%       | 24.77%    | 1.83%         | -8.81%         |
| <b>RSF</b>   | MJ             | -1.85%      | 29.10%    | 0.06%         | -5.27%         |
| <b>NRSF</b>  | MJ             | 18.76%      | 34.35%    | 10.46%        | -50.85%        |
| <b>FW</b>    | m <sup>3</sup> | -4.99%      | 27.10%    | 16.08%        | -19.07%        |

Deviations from declared average (2)

| OUTPUT FLOWS AND WASTE CATEGORIES | Unit | DUROFLOOR-R | DUROFLOOR | DUROFLOOR-PSF | DUROPRIMER-PRO |
|-----------------------------------|------|-------------|-----------|---------------|----------------|
| <b>HWD</b>                        | kg   | 5.91%       | 17.56%    | 6.88%         | -15.34%        |
| <b>NHWD</b>                       | kg   | 19.66%      | 6.25%     | -19.10%       | -8.33%         |
| <b>RWD</b>                        | kg   | -1.81%      | 28.56%    | 0.28%         | -5.29%         |
| <b>CRU</b>                        | kg   | -9.09%      | 21.75%    | 26.47%        | -31.70%        |
| <b>MFR</b>                        | kg   | 0.05%       | 24.68%    | 0.16%         | -5.48%         |
| <b>MER</b>                        | kg   | 0.00%       | 0.00%     | 0.00%         | 0.00%          |
| <b>EE</b>                         | MJ   | 0.00%       | 0.00%     | 0.00%         | 0.00%          |

Deviations from declared average (3)

| ADDITIONAL IMPACTS | Unit              | DUROFLOOR-R | DUROFLOOR | DUROFLOOR-PSF | DUROPRIMER-PRO |
|--------------------|-------------------|-------------|-----------|---------------|----------------|
| <b>PM</b>          | Disease incidence | 0.03%       | 19.20%    | 8.97%         | -12.11%        |
| <b>IRP</b>         | kBq U235 eq       | -1.73%      | 28.47%    | 0.21%         | -5.27%         |
| <b>ETP-FW</b>      | CTUe              | -4.99%      | 27.10%    | 16.08%        | -19.07%        |
| <b>HTP-c</b>       | CTUh              | 5.97%       | 32.23%    | -19.35%       | -0.35%         |
| <b>HTP-nc</b>      | CTUh              | 1.31%       | 23.89%    | -2.14%        | -4.50%         |
| <b>SQP</b>         | dimensionless     | 8.51%       | 12.94%    | -18.15%       | 1.83%          |

Deviations from declared average (4)

## Additional information

The EPD does not give information on release of dangerous substances to soil, water and indoor air because the horizontal standards on measurement of release of regulated dangerous substances from construction products using harmonized test methods according to the provisions of the respective technical committees for European product standards are not available.